

NISMO LED

A shallow surface mounted LED downlighter with a high luminous intensity and efficiency.

Its sleek, discreet design enables it to blend into a wide range of environments.



OPTIONS

► Square design

IP20

IP40

LED

CLASS
I

850°


F
MARK

CE

5YR
WARRANTY



PERFORMANCE

Light source	LED
Distribution	Symmetric
Luminous flux	1500lm – 2700lm
Beam angles	Ø190 50° / 110° / 120° Ø300 100°
CRI	>80
LOR	80%

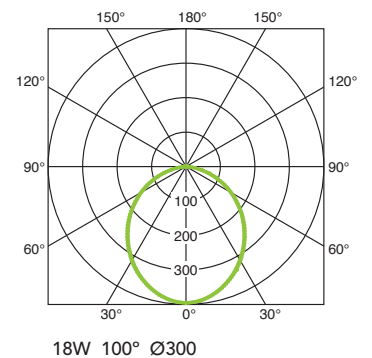

MATERIALS

Housing	Die-cast aluminium
Finish	Polyester painted matt white or silver
Reflector	High resistance, faceted polycarbonate, high vacuum mirror metallized
Diffuser	Opal polycarbonate, IP40 versions





FEATURES

- Average 50,000hr LED life – maintenance free
- Opal polycarbonate diffuser IP40 versions
- Passive thermal management – reduces ceiling load
- Latest generation COB LED light source
- Extremely shallow design, making it ideal for low ceilings

LED IP20 Ø190

LAMP	COLOUR TEMP	LUMENS	BEAM	FINISH	Standard	
					HF	DALI
12W	3000K	1500lm	50°	Matt white	32200101	32200103
12W	3000K	1500lm	50°	Silver	32200201	32200203
12W	4000K	1500lm	50°	Matt white	32200301	32200303
12W	4000K	1500lm	50°	Silver	32200401	32200403
12W	3000K	1500lm	110°	Matt white	32200501	32200503
12W	3000K	1500lm	110°	Silver	32200601	32200603
12W	4000K	1500lm	110°	Matt white	32200701	32200703
12W	4000K	1500lm	110°	Silver	32200801	32200803
12W	3000K	1500lm	120°	Matt white	32200901	32200903
12W	3000K	1500lm	120°	Silver	32201001	32201003
12W	4000K	1500lm	120°	Matt white	32201101	32201103
12W	4000K	1500lm	120°	Silver	32201201	32201203

LED IP40 Ø300

LAMP	COLOUR TEMP	LUMENS	BEAM	FINISH	Standard	
					HF	DALI
18W	3000K	2000lm	100°	Matt white	32201301	32201303
18W	3000K	2000lm	100°	Silver	32201401	32201403
18W	4000K	2000lm	100°	Matt white	32201501	32201503
18W	4000K	2000lm	100°	Silver	32201601	32201603
26W	3000K	2700lm	100°	Matt white	32201701	32201703
26W	3000K	2700lm	100°	Silver	32201801	32201803
26W	4000K	2700lm	100°	Matt white	32201901	32201903
26W	4000K	2700lm	100°	Silver	32202001	32202003