

CLUB LED

IP66 IK10 CLASS II CE

FEATURES & BENEFITS

- > Various lumen outputs
- > Long rated LED life >109,000hrs (L90/B10)
- > Easy to remove wiring plate
- > Surge protection up to 6/8 - 10 Kv
- > NTC thermal sensor to maintain stability
- > Zero flicker - wildlife friendly

PERFORMANCE



| | |
|------------------|----------------------------|
| Light source | LED (Samsung) |
| Distribution | Asymmetric (vertex at 30°) |
| LED output | 5200 - 26000lm |
| Luminaire output | 4475 - 22795lm |
| Lumen efficiency | ≥127lm/W |
| CRI | >80 |

MATERIALS

| | |
|----------|----------------------------|
| Body | Die-cast aluminium |
| Finish | Anthracite grey (RAL 7039) |
| Diffuser | 4mm clear tempered glass |
| Mounting | Ø60mm pole |

OPTIONS

- > Metal halide version
- > Adaptor for Ø40mm poles
- > Other colour temperatures - 3000K / 5000K
- > Road symmetrical lens (ideal for cycle paths)

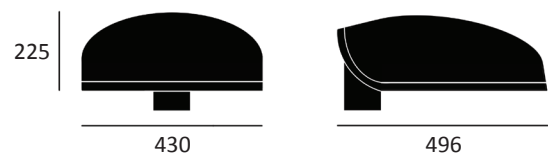

| LAMP | COLOUR TEMP | DELIVERED LUMENS | STANDARD | DALI |
|------|-------------|------------------|----------|----------|
| 35W | 4000K | 4475lm | 71000701 | 71000703 |
| 70W | 4000K | 8950lm | 71000801 | 71000803 |
| 105W | 4000K | 13420lm | 71000901 | 71000903 |
| 140W | 4000K | 17900lm | 71001001 | 71001003 |
| 175W | 4000K | 22795lm | 71101101 | 71101103 |