

MONTREAL LED

IP66	IK10	CLASS I	CE
------	------	---------	----

FEATURES & BENEFITS

- > High resistance to UV and oxidation
- > Finned back for superior heat dissipation
- > Average rated LED life >80,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance

PERFORMANCE



Light source	LED (Samsung)
LED output	1440 - 6520lm
Luminaire output	1300 - 5865lm
Lumen efficiency	≥130lm/W
CRI	>80

MATERIALS

Body	Die-cast aluminium
Finish	Anthracite grey (RAL 7039)
Diffuser	4mm tempered glass
Mounting	Steel bracket
External fixings	Stainless steel

OPTIONS

- > Other RAL finishes
- > Frosted glass
- > CRI>90
- > Vent filter
- > Ground spike
- > Wall arm bracket

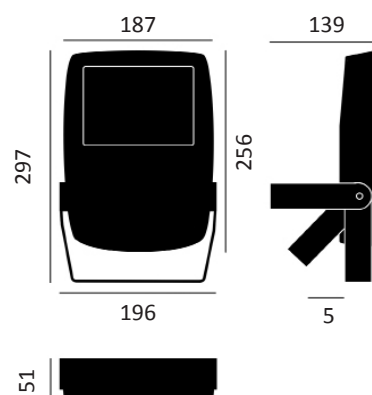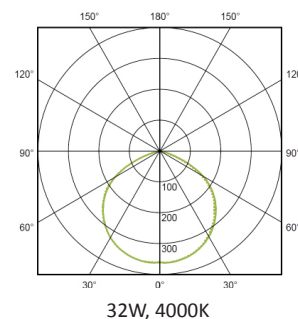

LAMP	COLOUR TEMP	LUMENS	STANDARD	DALI
10W	3000K	1300lm	72802501	72802503
10W	4000K	1350lm	72802101	72802103
21W	3000K	2890lm	72802601	72802603
21W	4000K	3010lm	72802201	72802203
32W	3000K	4315lm	72802701	72802703
32W	4000K	4495lm	72802301	72802303
37W	3000K	5630lm	72802801	72802803
37W	4000K	5865lm	72802401	72802403