

### INSTRUCTIONS

Make sure you have removed tension before installation or maintenance. Follow the installation procedures to ensure the unit functions properly. The product must not be modified; any change will void security approvals and will make the item dangerous. The manufacturer declines all responsibility on products being modified or not correctly installed.

Pic. 1) To access the wiring compartment, unscrew the four Allen screws.


Pic. 2) Mount the supplied cable gland and insert the power cord inside the product. It is recommended the use of a H05RN-F cable or equivalent (min 2x1 mm<sup>2</sup> max 2x1, 5 mm<sup>2</sup>). If the external cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person.

Pic. 3) Connect the wires to the terminal block in its own plastic box respecting the polarities.

Pic. 4) Close the projector by screwing the four Allen screws.

- Minimum/maximum installation height = 4 mt/12mt

- The projector, in the event of a failure, does not require replacement of any component, LED modules included. For bracket installations, the projector must be secured with at least 2 screws.

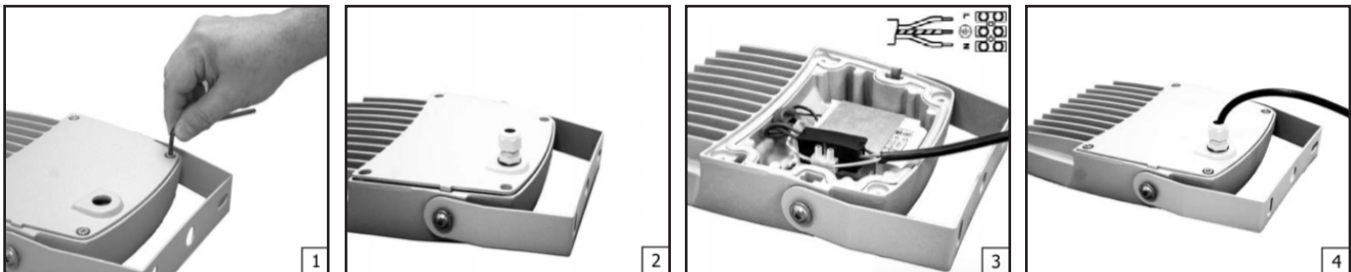

### IMPORTANT WARNINGS

Do not install the luminaire in areas without sufficient air circulation. The manufacturer cannot be considered liable for any damage caused by inappropriate use of the luminaire other than its manufactured purpose.

Luminaires must be installed by a qualified registered electrician only. Any misuse of the luminaire when power is activated may cause the risk of an electric shock.

The manufacturer does not accept any responsibility of any issues resulting from the non-compliance of the recommendations included in this instruction document. These instructions are issued as a guide to assist the installer to satisfactory conclusion.

The manufacturer reserves the right to change the design of this product without prior notice.

### WASTE DIRECTIVE

The European Directive 2002/96/EC on waste electrical and electronic equipment requires that electric and electronic devices must not be disposed of in the normal household waste. For correct disposal, please use authorized waste disposal facilities or return to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, should not be broken up as they contain pollutants, which are harmful to the environment. Unauthorized disposal of the foregoing waste material is punishable by law.

